







**1228 1071 0****1228 1035 0****1228 1065 0**

***Quality Vinyl Sheet
You can trust!***

**Rekord 42 Granada****1228 1072 0****1228 1002 0****1228 1012 0****1228 1051 0****1228 1013 0****1228 1003 0**

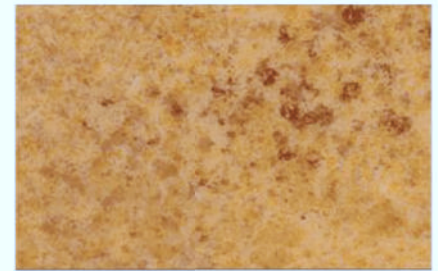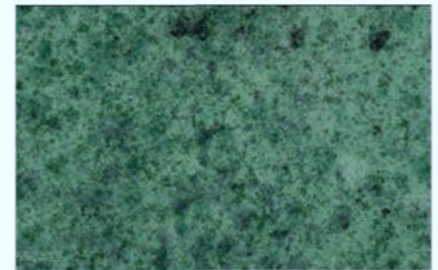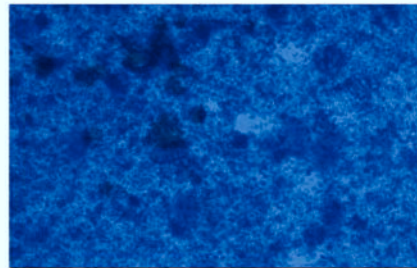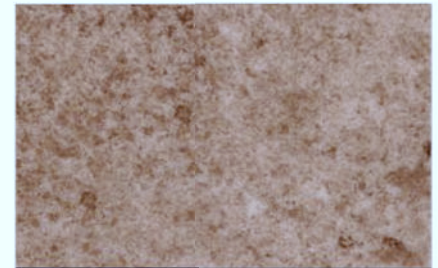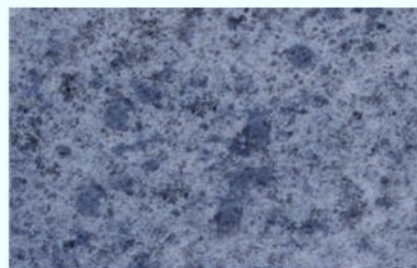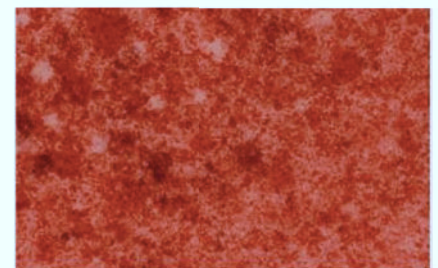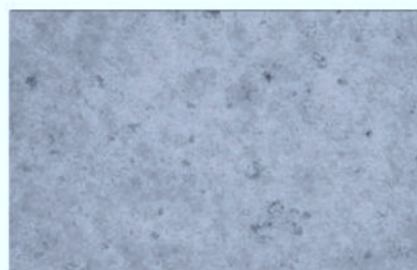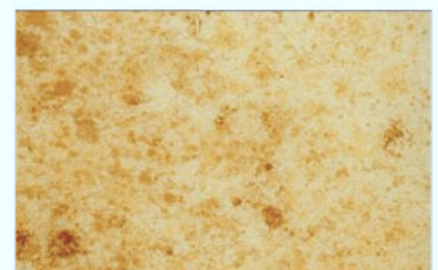

Technical Parameters

Warranty period (years)			10
Surface protection			Polyurethane PUR
Usability class	PN-EN 649+PN-EN 685		34/43
EC-Certificate of Conformity	PN-EN 14041		1488-CPD-0017/W
Reaction to fire	PN-EN 13501-1		B _{fl} -s1
Hygiene attest	-		Pass
Slip resistance	PN-EN 14041		Class DS
Dynamic coefficient of friction (along / cross)	EN 13893		0,66 / 0,68
Electrical properties	PN-EN 14041		Antistatic
Electrostatic potential	PN-EN 1815		≤ 2 kV
Total thickness	PN-EN 428	mm	2,0
Thickness of wear layer	PN-EN 429	mm	0,8
Weight	PN-EN 430	kg/m ²	3,1
Roll width	PN-EN 426	m	2
Roll length	PN-EN 426	m	20
Wear resistance	PN-EN 660-1	-	Group T
Residual indentation	PN-EN 433	mm	0,03
Dimensional stability after exposure to heat	PN-EN 434	%	$\leq 0,4$
Curling after exposure to heat	PN-EN 434	mm	≤ 8
Light resistance	PN-ISO 105-B02	-	> 7
Flexibility	PN-EN 435	-	Good
Chemical resistance	PN-EN 423	-	Good
Resistance to microorganisms	PN-EN ISO 846	-	Yes
Resistance to impact of wheeled chair	PN-EN 425	-	Good
Possibility to install in rooms with floor heating			Yes

