


1145 0071 0




1145 0006 0

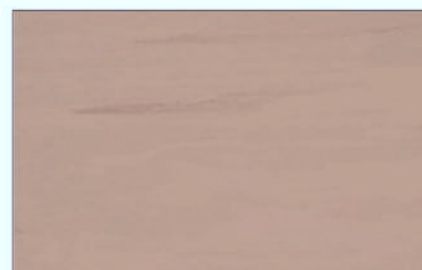


1145 0004 0

***Quality Vinyl Sheet
You can trust!***

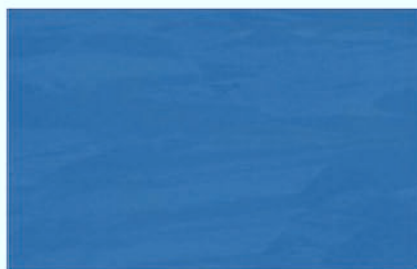


1145 0074 0

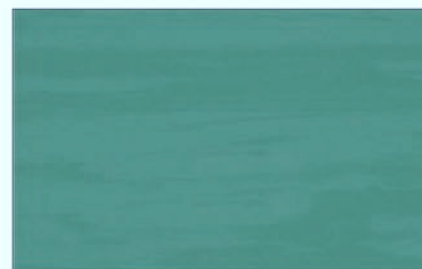

1145 0064 0




1145 0016 0

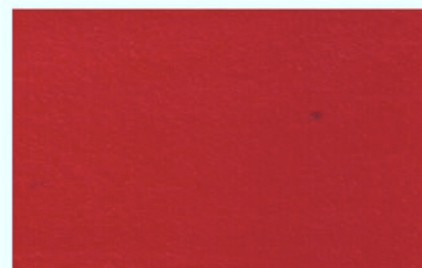

1145 0052 0



1145 0015 0

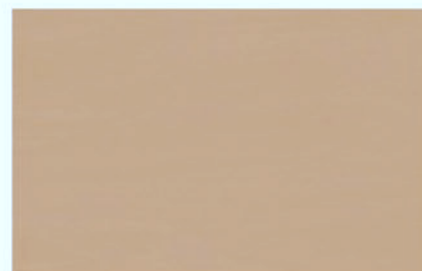

1145 0041 0



Technical Parameters

Warranty period (years)			5
Surface protection			Polyurethane PU
Usability class	PN-EN 649 + PN-EN 685		34/43
EC-Certificate of Conformity	PN-EN 14041		1488-CPD-0017/W
Lloyd's marine certificate	-		MED 0650114
Reaction to fire	PN-EN 13501-1		B _{fl} -s1
Hygiene attest	-		Pass
Electrical properties	PN-EN 14041		Astatic
Electrostatic voltage	PN-EN 1815		<= 2 kV
Slip resistance	PN-EN 14041		Class DS
Dynamic coefficient of friction (along / cross)	PN-EN 13893		0,39 / 0,43
Total thickness	PN-EN 428	mm	2,0
Thickness of wear layer	PN-EN 429	mm	2,0
Weight	PN-EN 430	kg/m ²	3,6
Roll width	PN-EN 426	m	2
Roll length	PN-EN 426	m	20
Tiles: side length	PN-EN 427	mm	610 x 610 608 x 608 500 x 500 300 x 300
Wear resistance	PN-EN 660-1	-	Group M
Residual indentation	PN-EN 433	mm	0,03
Dimensional stability after exposure to heat	PN-EN 434	%	<= 0,4
Curling after exposure to heat	PN-EN 434	mm	<=8
Light resistance	PN-ISO 105-B02	-	7
Flexibility	PN-EN 435	-	Good
Chemical resistance	PN-EN 423	-	Good
Resistance to microorganisms	PN-EN ISO 846	-	Yes
Resistance to impact of wheeled chair	PN-EN 425	-	Good
Possibility to install in rooms with floor heating			Yes